


technical data:

nominal torque: 35 Nm
 maximum torque: 70 Nm
 torsional stiffness: 9 Nm/arcmin
 moment of inertia: $0,15 \cdot 10^{-3} \text{ kgm}^2$
 max. axial shaft displacement: $\pm 0,5 \text{ mm}$
 max. lateral shaft displacement: 0,2 mm
 axial spring rate: 70 N/mm
 lateral spring rate: 450 N/mm
 temperature range: -40° up to $+200^\circ\text{C}$
 maximum speed: 14.000 rpm
 $D1/2\text{min}/\text{max} = \phi 10 / \phi 32 \text{ mm}$
 mass: approx. 0,35 kg

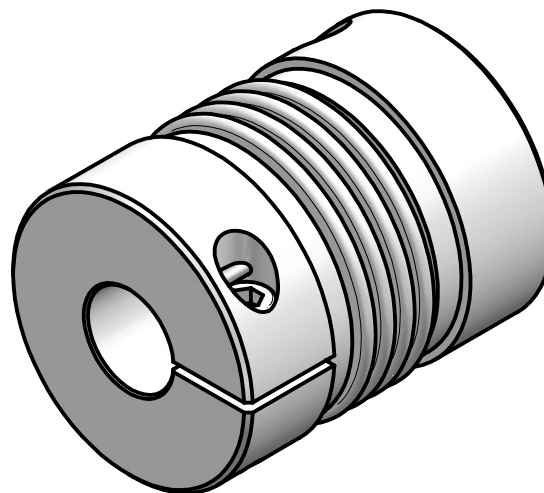

material:

bellows: stainless steel
 hubs: high tensile aluminium
 clamping screws: ISO 4762 - 12.9
 press-fit wire: brass

Änderung					Werkstoffbezeichnung	Werkstoffnummer	Maßstab
					-	-	1:1
					Rohteil-/Vorteilnummer	Gewicht	
					-	- kg	
		gepr.			Metal bellows coupling KP 35 / 72		
		gez.	11.05.17	Be			
Passung	Abmaß		Datum	Name	Benennung	Format A4	Artikelnummer
DIN ISO 13715	DIN ISO 2768-mK						MB-079 22689-e
	0,5 ... 6 $\pm 0,1$						
	6 ... 30 $\pm 0,2$						
	30 ... 120 $\pm 0,3$						
	120 ... 315 $\pm 0,5$						
	315 ... 1000 $\pm 0,8$						
			D-63839-Kleinwallstadt		Ersatz für	-	ersetzt durch -