


Mechanical power clamping nut I Series MCA

with bottomed thread / thread protected / centered operation / compact Design

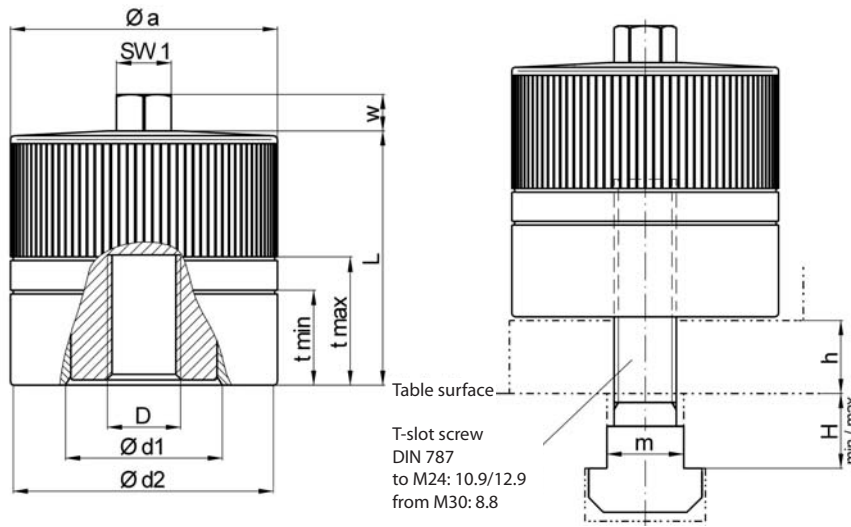

Technical data and dimensions [mm]: length dimensions according to DIN ISO 2768 mH

nominal MCA clamping force Size	nominal thread D*	nominal tightening torque [Nm]	max. static load [kN]	T-slot m	DIN 650 H min/max	weight approx. [kg]	Øa	Ød1	Ød2	screw-in depth		SW 1	w	
										L	t min max			
60	M 12	20	70	14	14 / 19	0,9	62	32	60	50	16	24	13	10
	M 16	25	120	18	18 / 24									
	M 20	30	120	22	22 / 29									
100	M 16	35	130	18	18 / 24	1,8	73	42	71	70	25	35	15	10
	M 20	40	200	22	22 / 29									
	M 24	45	200	28	28 / 36									
150	M 30	50	200	36	36 / 46	2,5	83	52	81	75	30	40	17	12
	M 24	60	300	28	28 / 36									
	M 30	70	300	36	36 / 46									
	M 36	75	300	42	42 / 53									
200	M 42	80	300	48	48 / 59	2,2	120	82	118	80	35	45	19	12
	M 36	120	400	42	42 / 53									
	M 42	125	450	48	48 / 59									
	M 48	130	450	54	54 / 66									
	M 56	140	500	-	-	4,5								
	M 64	150	500	-	-	4,3								

* Property class of threaded bolt up to M 24 minimum Q 10.9; from M 30 Q 8.8 (further thread sizes i. e. inches on request)
max. allowed temperature range: -30°C up to +200°C

Note:

For optical control of actual screw-in depth of the T-bolt two grooves have been provided on the housing circumference matching t_{min} and t_{max} . When laying out the actual screw-in depth of the threaded bolt, the necessary stroke must be considered i. e. the max. specified screw-in depth must be reduced at least by amount the stroke.

Ordering example: Clamping nut incl. T-bolt MCA 100 - M 24
MCA 150 - 36 - 60 - 40

Series and size _____
Thread size or rather T-slot dimension DIN 650 (m = 36 mm) _____
Clamping high (h = 60 mm) _____
Size of T-slot (H = 40 mm) _____