


technical data:

nominal torque: 140 Nm
 maximum torque: 280 Nm
 torsional stiffness: 32 Nm/arcmin
 moment of inertia: $0,74 \cdot 10^{-3} \text{ kgm}^2$
 max. axial shaft displacement: $\pm 0,3 \text{ mm}$
 max. lateral shaft displacement: $0,1 \text{ mm}$
 axial spring rate: 210 N/mm
 lateral spring rate: 7000 N/mm
 temperature range: -40° up to $+300^\circ\text{C}$
 maximum speed: 18.000 rpm
 $D1/2\text{min}/\text{max} = \phi 18 / \phi 42 \text{ mm}$
 mass: approx. 1,1 kg

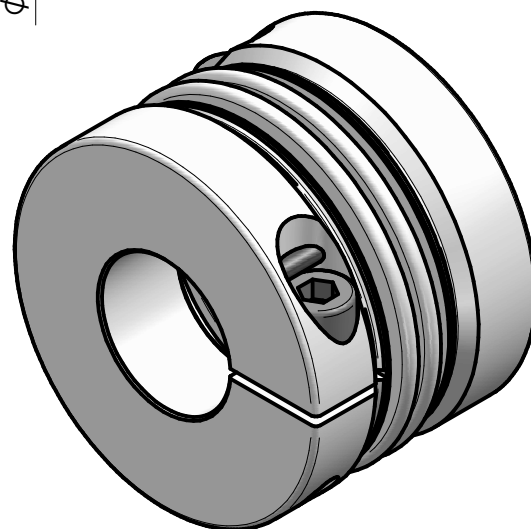

material:

bellows: stainless steel
 hubs: Steel St 52
 clamping screws: ISO 4762 - 12.9

		Änderung	Werkstoffbezeichnung		Werkstoffnummer	Maßstab
			-		-	
			Rohteil-/Vorteilnummer		Gewicht	
			-		- kg	1:1
			gepr.	12.12.23	IA	metal bellows coupling KG 140 / 2W - standard
			gez.	26.05.15	Be	
Passung	Abmaß		Datum	Name	Benennung	Format A4
DIN ISO 13715	DIN ISO 2768-mK				Artikelnummer	MB-046 20368-e
	0,5 ... 6 $\pm 0,1$ 6 ... 30 $\pm 0,2$ 30 ... 120 $\pm 0,3$ 120 ... 315 $\pm 0,5$ 315 ... 1000 $\pm 0,8$				Ersatz für	ersetzt durch
					-	-