


technical data:

nominal torque: 40 Nm
 maximum torque: 80 Nm
 torsional stiffness: 16 Nm/arcmin
 moment of inertia: $0,19 \cdot 10^{-3} \text{ kgm}^2$
 max. axial shaft displacement: $\pm 0,3 \text{ mm}$
 max. lateral shaft displacement: $0,1 \text{ mm}$
 axial spring rate: 130 N/mm
 lateral spring rate: 2500 N/mm
 temperature range: -40° up to $+300^\circ \text{C}$
 maximum speed: 23.000 rpm
 $D1/2\text{min}/\text{max} = \phi 12 / \phi 32 \text{ mm}$

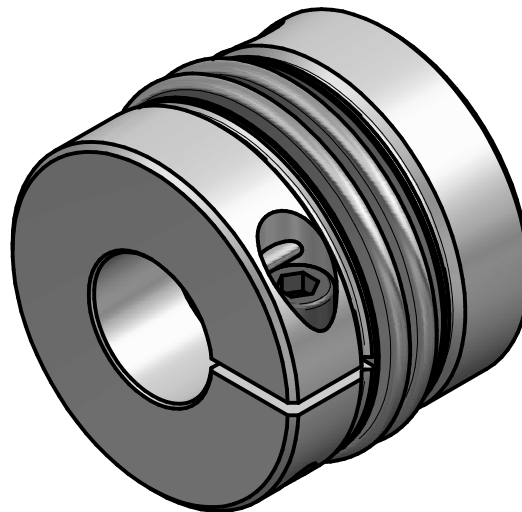

material:

bellows: stainless steel
 hubs: Steel St 52
 clamping screws: ISO 4762 - 12.9

Änderung					Werkstoffbezeichnung	Werkstoffnummer	Maßstab
					-	-	1,25:1
					Rohteil-/Vorteilnummer	Gewicht	
					-	0,5 kg	
		gepr.	08.08.23	AR	metal bellows coupling KG 40 / 2W - standard		
		gez.	08.08.23	MB			
Passung	Abmaß	Datum	Name	Benennung	Format	Artikelnummer	
DIN ISO 13715 -0,4 +0,8	DIN ISO 2768-mK 0,5 ... 6 $\pm 0,1$ 6 ... 30 $\pm 0,2$ 30 ... 120 $\pm 0,3$ 120 ... 315 $\pm 0,5$ 315 ... 1000 $\pm 0,8$				A4	MB-046 21761-e	
		D-63839-Kleinwallstadt		Ersatz für	-	ersetzt durch	-