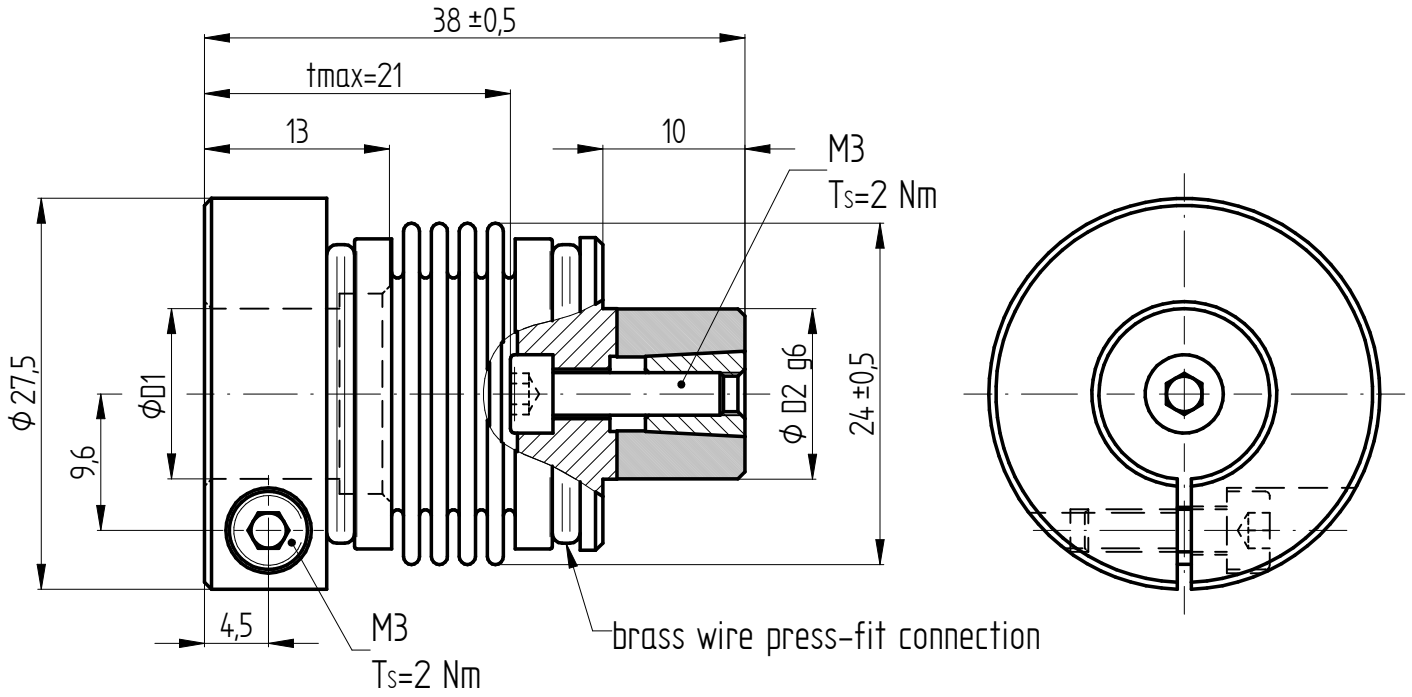

technical data:

nominal torque: 2 Nm
torsional stiffness: 0,4 Nm/arcmin
moment of inertia: 3,1 kgmm²
max. axial shaft displacement: ± 0,25 mm
max. lateral shaft displacement: 0,1 mm
axial spring rate: 32 N/mm
lateral spring rate: 100 N/mm
temperature range: -40° up to +200°C
maximum speed: 41.000 rpm
D1 max = 14 mm
D2 min/max = Φ8 / Φ12 mm
mass: 0,045 kg

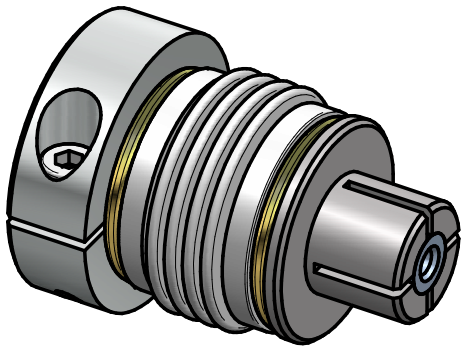

material:

bellows: stainless steel
hubs: high-tensile strength aluminium
expanding cone: heat treated steel
clamping screws: ISO 4762 - 12.9
press-fit wire: brass

		Änderung				Werkstoffbezeichnung: -	Werkstoffnummer: -	Maßstab: 2:1
						Rohteil-/Vorteilnummer: -	Gewicht: - kg	
		gepr.	20.12.23	IA		metal bellows coupling KPS 2 - L		
Passung	Abmaß	gez.	18.01.21	Be				
DIN ISO 13715	DIN ISO 2768-mK		Datum	Name		Benennung		
	0,5 ... 6 ± 0,1 6 ... 30 ± 0,2 30 ... 120 ± 0,3 120 ... 315 ± 0,5 315 ... 1000 ± 0,8		JAKOB Antriebstechnik D-63839-Kleinwallstadt			Format A4 Artikelnummer MB - 105 16962 - e		
						Ersatz für -	ersetzt durch -	

Eigentumsrechte, Urheberrechte und Vervielfältigungsverbot beachten, siehe auch DIN 34.