


material:  
heat treated steel – nitro carburized  
cover plate: high tensile aluminum

Technical data:  
nominal clamping force: 200 kN  
nominal actuation torque: 120 Nm  
max. static load: 400 kN  
weight (without threaded rod): approx. 6 kg  
max. allowed temperature range: -30°C up to +200°C (optional +400°C)

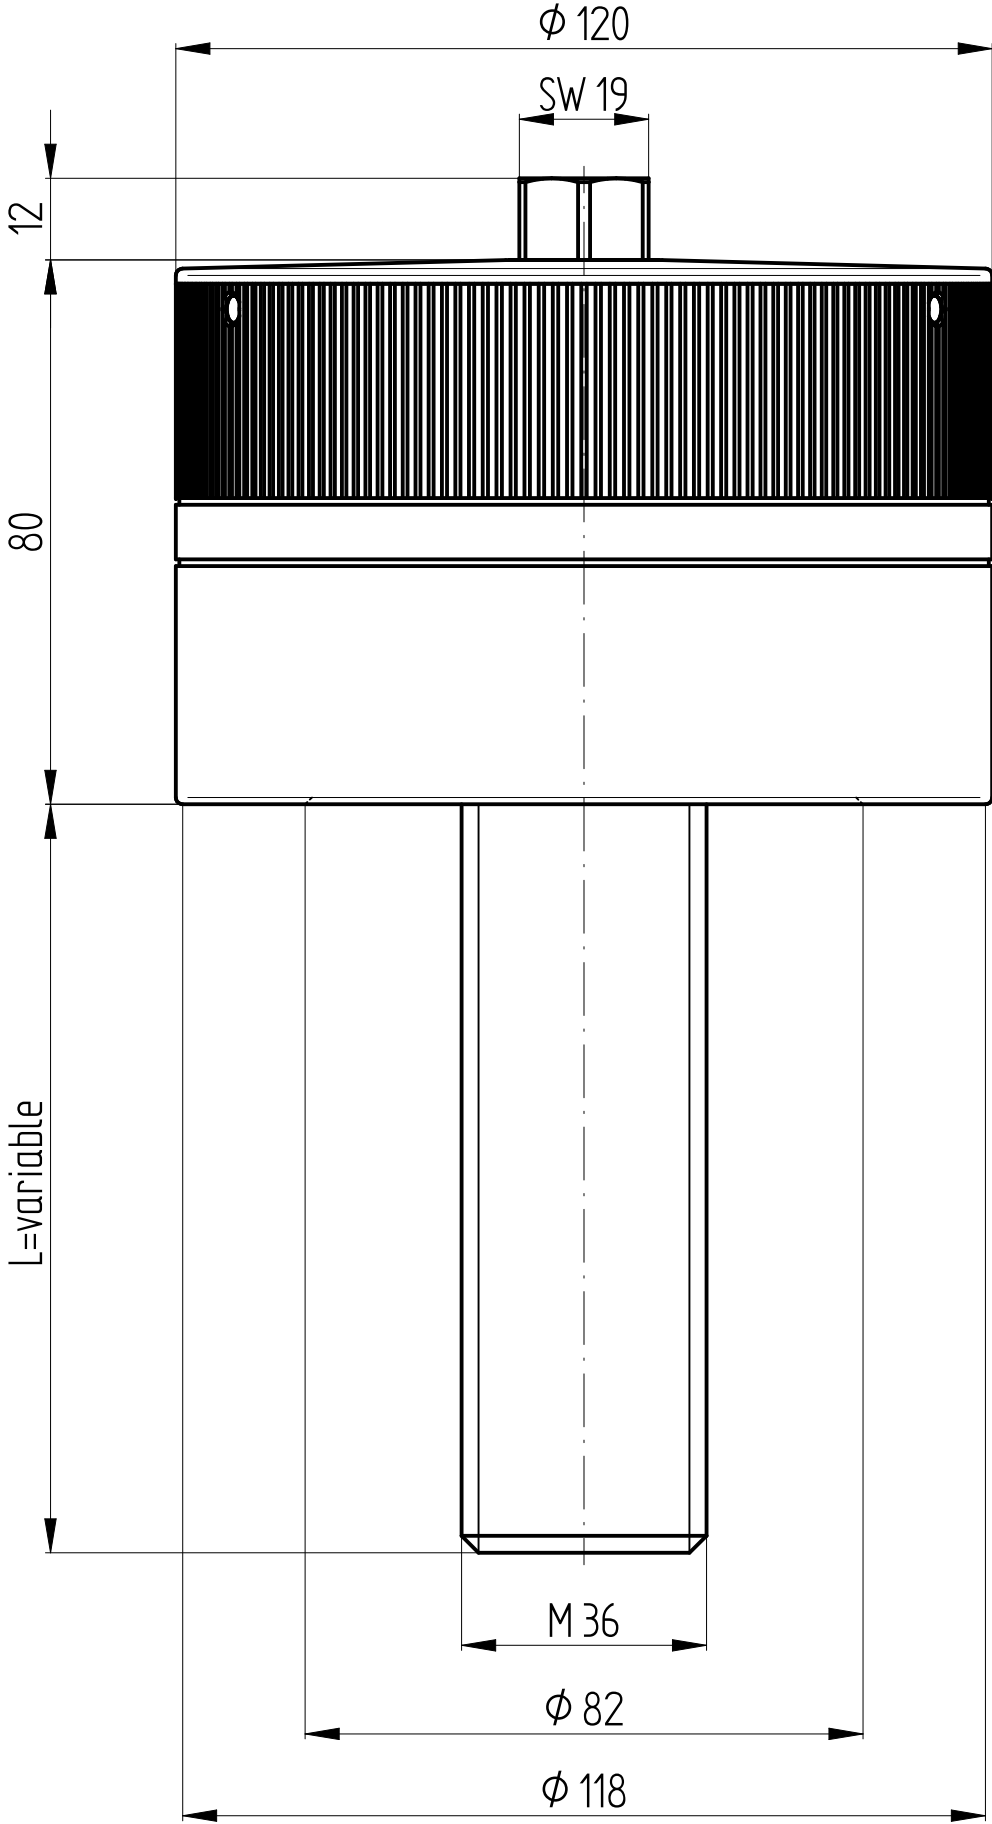

|               |                    |       |          |    |  |                               |                 |                    |
|---------------|--------------------|-------|----------|----|--|-------------------------------|-----------------|--------------------|
|               |                    |       |          |    |  | Werkstoffbezeichnung          | Werkstoffnummer | Maßstab            |
|               |                    |       |          |    |  | -                             | -               | 0,9                |
|               |                    |       |          |    |  | Rohteil-/Vorteilnummer        | Gewicht         |                    |
|               |                    |       |          |    |  | -                             | - kg            |                    |
|               |                    |       |          |    |  | Mechanical power clamping nut |                 |                    |
|               |                    |       |          |    |  | MCG 200 - M36                 |                 |                    |
|               |                    |       |          |    |  | Benennung                     | Format A3       | MB - 057 31562 - e |
|               |                    |       |          |    |  | Artikelnummer                 |                 |                    |
|               |                    |       |          |    |  | Ersatz für                    | -               | ersetzt durch -    |
| Passung       | Abmaß              | gez.  | 22.12.15 | Be |  |                               |                 |                    |
| DIN ISO 13715 | DIN ISO 2768-mK    | Datum | Name     |    |  |                               |                 |                    |
|               | 0,5 ... 6 ± 0,1    |       |          |    |  |                               |                 |                    |
|               | 6 ... 30 ± 0,2     |       |          |    |  |                               |                 |                    |
|               | 30 ... 120 ± 0,3   |       |          |    |  |                               |                 |                    |
|               | 120 ... 315 ± 0,5  |       |          |    |  |                               |                 |                    |
|               | 315 ... 1000 ± 0,8 |       |          |    |  |                               |                 |                    |