


technical data:

nominal torque: 4 Nm
 maximum torque: 8 Nm
 torsional stiffness: 0,46 Nm/arcmin
 moment of inertia: 3,7 kgmm²
 max. axial shaft displacement: ± 0,4 mm
 max. lateral shaft displacement: 0,2 mm
 axial spring rate: 35 N/mm
 lateral spring rate: 65 N/mm
 temperature range: -40° up to +200°C
 maximum speed: 20.000 rpm
 D1min/max = Ø5 / Ø10 mm
 D2max=Ø14
 mass: approx. 40 g

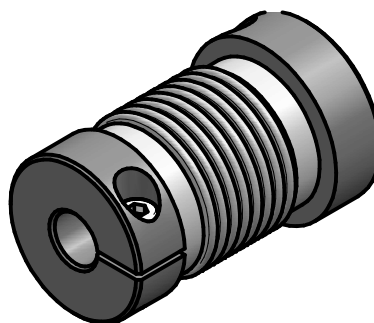

material:

bellows: stainless steel
 hubs: high tensile aluminium
 clamping screws: ISO 4762 - 12.9
 press-fit wire: brass

		Änderung				Werkstoffbezeichnung	Werkstoffnummer	Maßstab
						-	-	2:1
						Rohteil-/Vorteilnummer	Gewicht	
						-	- kg	
		gepr.			Miniature metal bellows coupling			
Passung	Abmaß	gez.	25.01.18	Be	type MKM 4 - St - L			
DIN ISO 13715	DIN ISO 2768-mK	Datum	Name	Benennung				
	0,5 ... 6 ± 0,1 6 ... 30 ± 0,2 30 ... 120 ± 0,3 120 ... 315 ± 0,5 315 ... 1000 ± 0,8		D-63839-Kleinwallstadt	Format A4	Artikelnummer MB - 064 11161 - e			
		Ersatz für	-	ersetzt durch	-			