
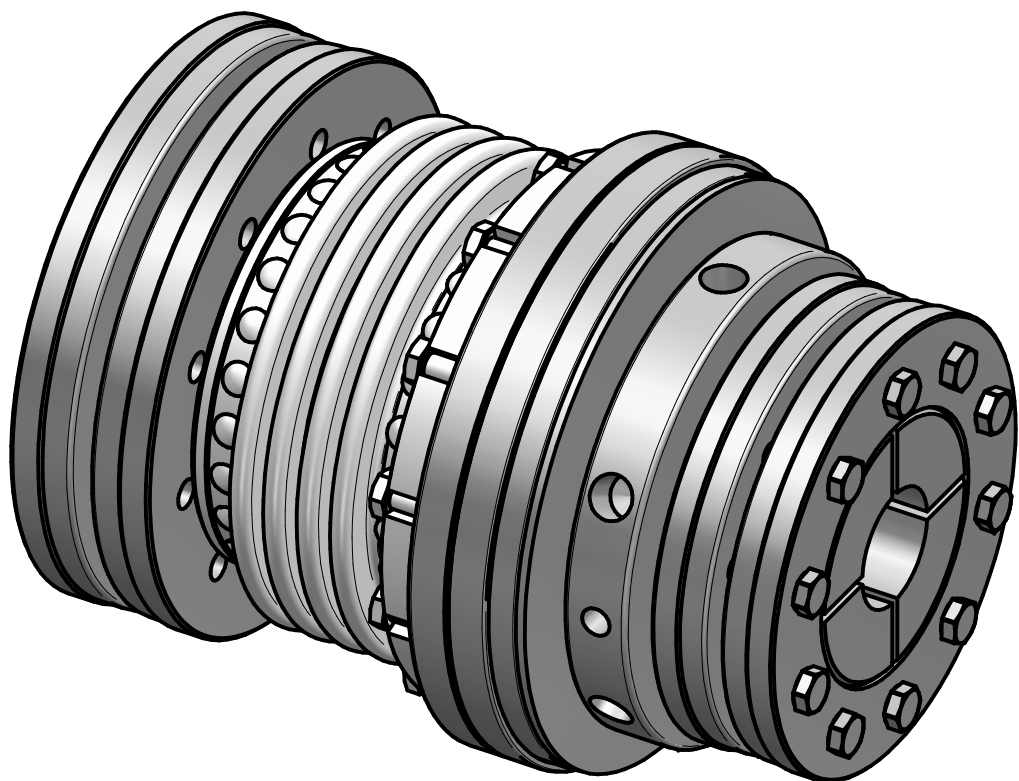
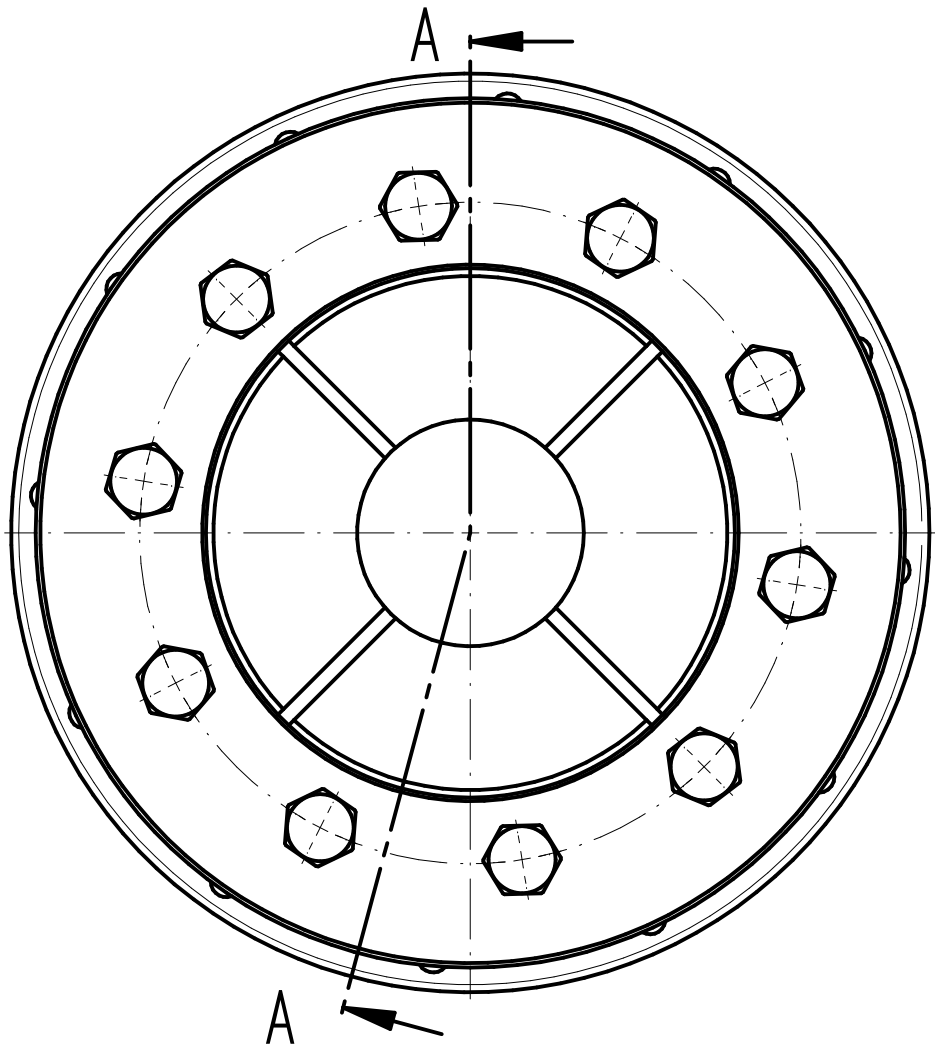


shrink disc - 1 -
10x M12 - ISO4017
TA=115Nm

334 ±1

A-A


shrink disc - 2 -
10x M10 -ISO4017
TA=67Nm

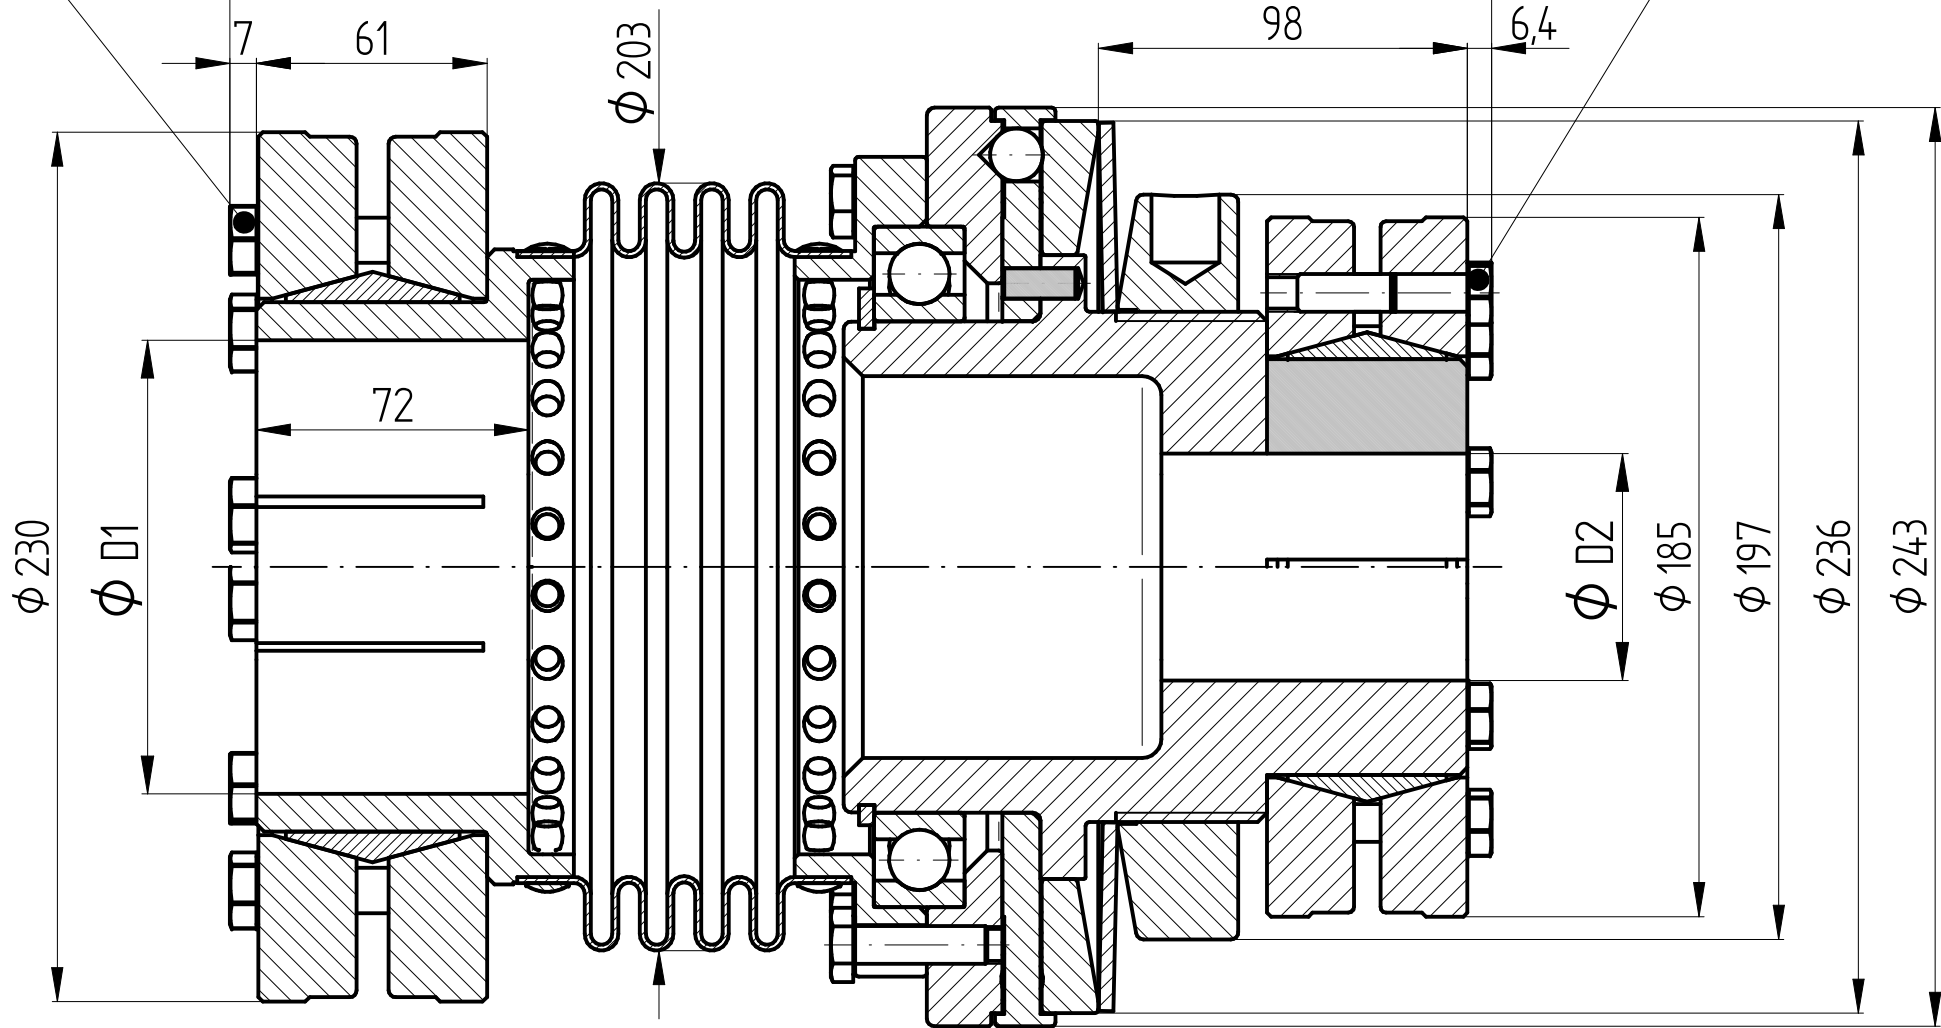

Technical Data:

setting range: 1500 - 3000 Nm
torsional stiffness: 600 Nm/arcmin
max. axial shaft displacement: ± 3 mm
max. lateral shaft displacement: 1,2 mm
mass: ca. 50 kg
moment of inertia: 400 10⁻³ kgm²
ØD1 min/max: 95 / 130 mm
ØD2 min/max: 50 / 95 mm
temperature range: -30°C bis +150°C

material
safety part: heat-treated steel
conical hub: heat-treated steel
bellows: stainless steel
screws: ISO 4017 / 10.9

		Änderung				Werkstoffbezeichnung	Werkstoffnummer	Maßstab	
						-	-	1 : 2	
						Rohteil-/Vorteilnummer	Gewicht		
						-	kg		
		gepr.	28.09.23	IA	safety coupling type SKB-KP 3000				
Passung	Abmaß	gez.	21.08.15	AR					
DIN ISO 13715	DIN ISO 2768-mK				Benennung				
	0,5 ... 6 ±0,1				Format A3	MB-14522221	Index e		
	6 ... 30 ±0,2				Artikelnummer				
	30 ... 120 ±0,3					Ersatz für	-	ersetzt durch	-
	120 ... 315 ±0,5								
315 ... 1000 ±0,8									