


1:2

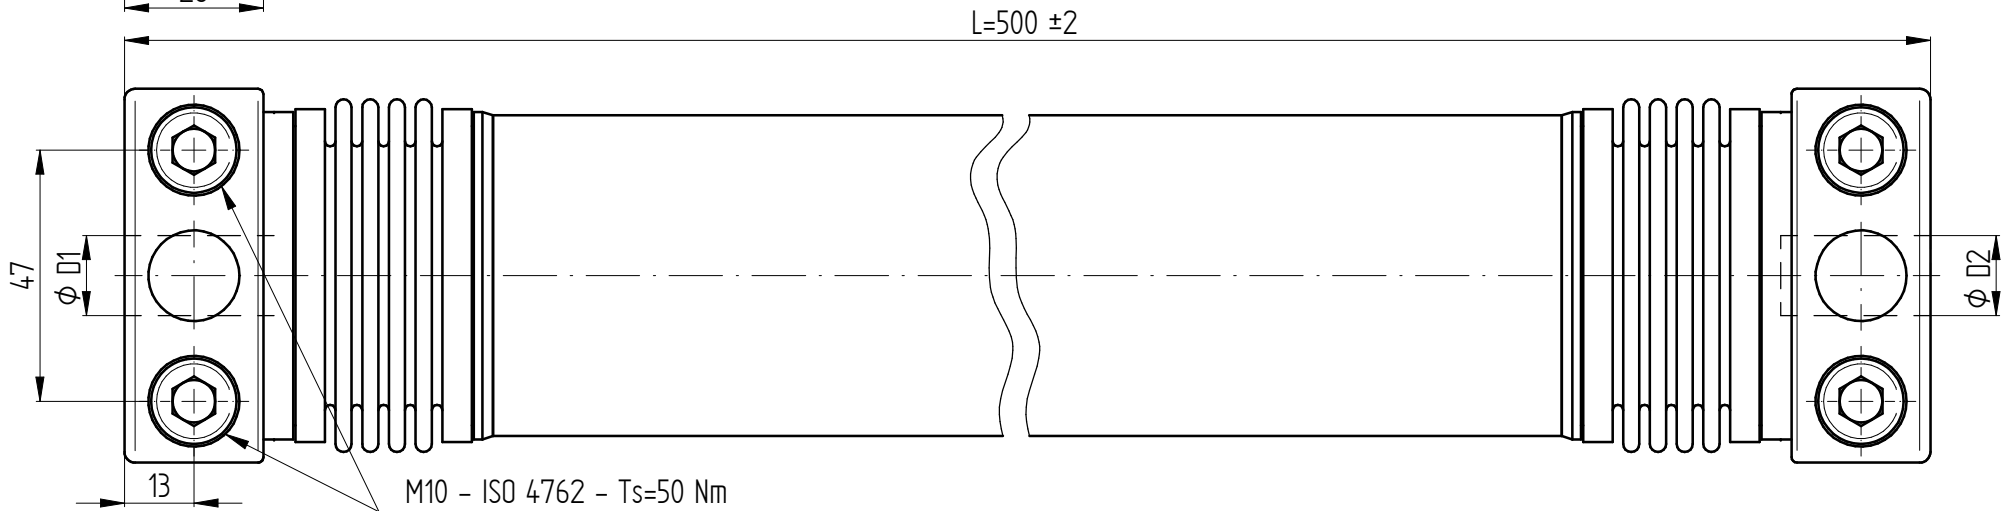

#### technical Data:

nominal torque	100	Nm
maximum torque	200	Nm
torsional stiffness	4,1	Nm/arcmin
max. radial shaft displacement	7	mm
max. axial shaft displacement	± 1,5	mm
mass	2,0	kg
moment of inertia	1,2	10 <sup>-3</sup> kgm <sup>2</sup>
max. speed	8.000	min <sup>-1</sup>
D1 - D2 min/max	12,5/35	mm
temperature range	-40 up to +200	°C

#### material:

bellows: stainless steel 1.4571  
hubs: high-tensile strength aluminium  
intermediate pipe: high-tensile strength aluminium

Werkstoffbezeichnung		Werkstoffnummer	Maßstab
-		-	1:1
Rohteil-/Vorteilnummer		Gewicht	
-		- kg	
Metal Bellows Coupling with Intermediate Pipe			
WDS 100 - L=0,5m			
Format A3		MB-140 20944-0,5m-e	
Artikelnummer		Ersatz für	
-		ersetzt durch	
-		-	