
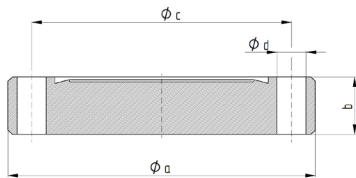


Blindflansche

Blindflansch fest aus Edelstahl (1.4301)





DN	16	35	63	100	150	200
a mm	34	69,5	113,5	152	202,5	253
b mm	7,3	13	17,5	20	22	24,5
Øc mm	27	58,7	92,2	130,3	181	231,8
Ød mm	6x4,3	6x6,6	8x8,5	16x8,5	20x8,5	24x8,5
Art.Nr.:	50750938	50750300	50750902	50750904	50750909	50751868

nach DIN ISO 2768-mK

DN	250
Øa mm	306
b mm	26
Øc mm	284
Ød mm	32x8,5
Art.Nr.:	50751869

- Druckbereich: bis $1 \cdot 10^{-12}$ hPa
- Temperaturbereich: -196°C bis 300°C

Blindflansch drehbar aus Edelstahl (1.4301)

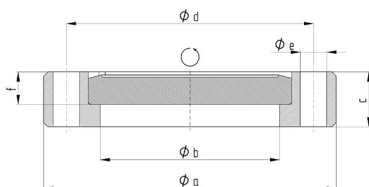

DN	16	35	63	100	150	200
Øa mm	34	69,5	113,5	152	202,5	253
Øb mm	18,2	43	71	104,5	154,5	207
c mm	7,3	13	19	21,5	24	24,5
Ød mm	27	58,7	92,2	130,3	181	231,8
Øe	6x4,3	6x6,6	8x8,5	16x8,5	20x8,5	24x8,5
f	1,5	5,4	6,3	7,2	8,2	7,4
Art.Nr.:	31751871	31750928	31751872	31751873	31751874	31751875

nach DIN ISO 2768-mK

DN	250
Øa mm	306
Øb mm	258
c mm	26
Ød mm	284
e mm	32x8,5
f mm	8
Art.Nr.:	31751876

- Druckbereich: bis $1 \cdot 10^{-12}$ hPa
- Temperaturbereich: -196°C bis 300°C