
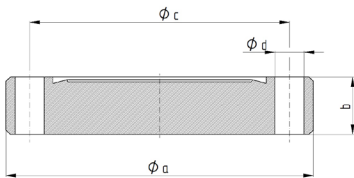


Blind Flange

Blind Flange fixed, made of stainless steel (1.4301)





DN	16	35	63	100	150	200
a mm	34	69,5	113,5	152	202,5	253
b mm	7,3	13	17,5	20	22	24,5
Øc mm	27	58,7	92,2	130,3	181	231,8
Ød mm	6x4,3	6x6,6	8x8,5	16x8,5	20x8,5	24x8,5
Art.Nr.:	50750938	50750300	50750902	50750904	50750909	50751868

according to DIN ISO 2768-mK

DN	250
Øa mm	306
b mm	26
Øc mm	284
Ød mm	32x8,5
Art.Nr.:	50751869

- Pressure range: up to $1 \cdot 10^{-12}$ hPa
- Temperature range: -196°C up to 300°C

Blind Flange rotatable, made of stainless steel (1.4301)

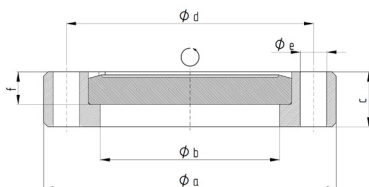

DN	16	35	63	100	150	200
Øa mm	34	69,5	113,5	152	202,5	253
Øb mm	18,2	43	71	104,5	154,5	207
c mm	7,3	13	19	21,5	24	24,5
Ød mm	27	58,7	92,2	130,3	181	231,8
Øe	6x4,3	6x6,6	8x8,5	16x8,5	20x8,5	24x8,5
f	1,5	5,4	6,3	7,2	8,2	7,4
Art.Nr.:	31751871	31750928	31751872	31751873	31751874	31751875

according to DIN ISO 2768-mK

DN	250
Øa mm	306
Øb mm	258
c mm	26
Ød mm	284
e mm	32x8,5
f mm	8
Art.Nr.:	31751876

- Pressure range: up to $1 \cdot 10^{-12}$ hPa
- Temperature range: -196°C up to 300°C