
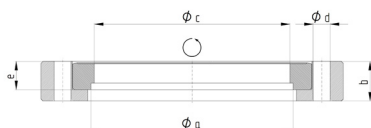


Weld-on flange rotatable

CF



DN	16	35	40	63	100	150
Øa mm	18	38	42,4	70	104	154
b mm	7,3	13	13	19	21,5	24
Øc mm	16	35	38,2	66	100	150
Ød mm	6x4,3	6x6,6	6x6,6	8x8,5	16x8,5	20x8,5
e mm	4,7	5,3	5,3	9,5	11	12,7
für Rohr	18x1	38x1,5	42,4x2	70x2	104x2	154x2
Art.Nr.:	32151893	32151894	32150913	32150898	32150907	32151895

according to DIN ISO 2768-mK

DN	200	250
Øa mm	206	256
b mm	24,5	26
Øc mm	200	250
Ød mm	24x8,5	32x8,5
e mm	12,7	12,7
für Rohr	206x3	256x3
Art.Nr.:	32151896	32151897

- Pressure range: $1 \cdot 10^{-12}$ hPa
- Material: 1.4301
- Temperature range: -196°C up to 300°C