
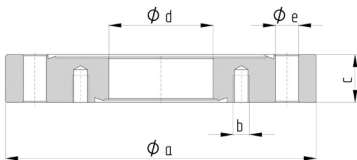


## Reducing flange CF-CF

CF



| DN       | 35/16    | 63/16    | 63/35    | 100/35   | 100/63   | 150/35   |
|----------|----------|----------|----------|----------|----------|----------|
| Øa mm    | 69,5     | 113,5    | 113,5    | 152      | 152      | 202,5    |
| b mm     | 6xM4     | 6xM4     | 6xM6     | 6xM6     | 8xM8     | 6xM6     |
| c mm     | 13       | 17,5     | 17,5     | 20       | 20       | 22       |
| Ød mm    | 16       | 16       | 38,1     | 38,1     | 63,5     | 38,1     |
| Øe mm    | 6x6,6    | 8x8,5    | 8x8,5    | 16x8,5   | 16x8,5   | 20x8,5   |
| Art.Nr.: | 51651716 | 51651918 | 51651919 | 51651920 | 51651921 | 51651922 |


according to DIN ISO 2768-mK

| DN       | 150/63   | 150/100  |
|----------|----------|----------|
| Øa mm    | 202,5    | 202,5    |
| b mm     | 8xM8     | 16xM8    |
| c mm     | 22       | 22       |
| Ød mm    | 63,5     | 101,6    |
| Øe mm    | 20x8,5   | 20x8,5   |
| Art.Nr.: | 51651923 | 51651924 |

- The small flange side has threaded blind holes. Please ensure the correct screw length during installation.
- Pressure range: 1\*10<sup>-12</sup> hPa • Temperature range: -196°C to 300°C
- Other dimensions and designs available upon request (also off-center)

## Reducing flange CF-CF

CF

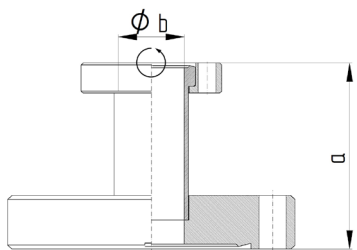

| DN       | 35/16    | 63/16    | 63/35    | 100/16   | 100/35   | 100/63   |
|----------|----------|----------|----------|----------|----------|----------|
| a mm     | 45       | 60       | 75       | 95       | 75       | 95       |
| Øb mm    | 16       | 16       | 36       | 16       | 36       | 60       |
| Art.Nr.: | 32351718 | 32351925 | 32351926 | 32351927 | 32351928 | 32351929 |

| DN       | 150/16   | 150/35   | 150/63   | 150/100  | 200/16   | 200/35   |
|----------|----------|----------|----------|----------|----------|----------|
| a mm     | 110      | 75       | 100      | 105      | 120      | 80       |
| Øb mm    | 16       | 36       | 60       | 97,6     | 16       | 36       |
| Art.Nr.: | 32351930 | 32351931 | 32351932 | 32351933 | 32351934 | 32351935 |

according to DIN ISO 2768-mK

| DN       | 200/63   | 200/100  | 200/150  |
|----------|----------|----------|----------|
| a mm     | 100      | 105      | 110      |
| Øb mm    | 60       | 97,6     | 146,4    |
| Art.Nr.: | 32351936 | 32351937 | 32351938 |

- Reduced flange side, rotatable • Weld surface: polished
- Other lengths and pipe dimensions available upon request
- Tightness: ≤1\*10<sup>-11</sup> Pa m<sup>3</sup>/s • Pressure range: 1\*10<sup>-12</sup> hPa
- Material: 1.4301 • Temperature range: -196°C to 300°C