


Flexible Connectors

Flexible Connector

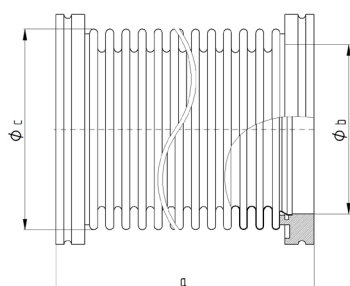

DN	63	100	160	160	200	250
a mm	127	127	140	220	220	220
Øb mm	70	102	153	153	240	261
Øc mm	83	122	173	173	250	300
Axial stroke mm	±8	±8	±10	±12,5	±12,5	±12,5
Art. Nr.:	33250642	33250649	33251691	33250213	33251692	33251693

according to DIN ISO 2768-mK

- Other nominal diameters and combinations on request
- Material: Stainless steel 1.4301; Balg 1.4541
- Temperature range: -196°C up to 300°C
- Pressure range: 1×10^{-8} hPa