


optional
- Initiator -
clamping control

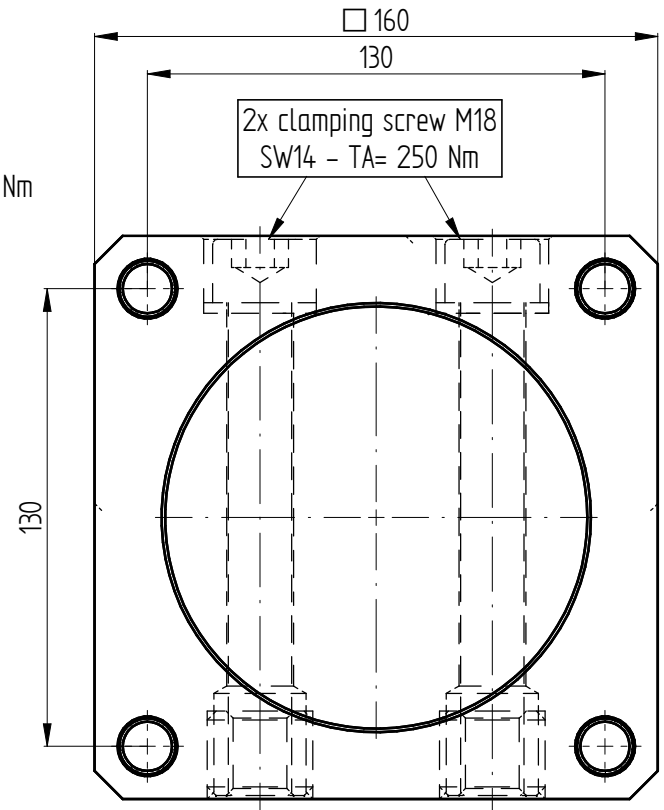

Material
high tensile aluminium - anodized
threaded bushing: heat treated steel
screws: ISO 4762 - 12.9

axial operating force (push-pull) FA = 100 kN
vertical force - side load FV = 100 kN
bending moment MB = 12.000 Nm

				Werkstoffbezeichnung	Werkstoffnummer	Maßstab
				-	-	0,7
				Rohteil-Vorteilnummer	Gewicht	
				-	11,1 kg	
				sectional rail coupling PKP 160 x 160		
				MB - PKP 160 - e		
Passung	Abmaß	gez.	01.10.19	Be	Benennung	
DIN ISO 13715	DIN ISO 2768-mK		Datum	Name	Format A3	Artikelnummer
	0,5 ... 6 ± 0,1					
	6 ... 30 ± 0,2					
	30 ... 120 ± 0,3					
	120 ... 315 ± 0,5					
	315 ... 1000 ± 0,8					
				Ersatz für		
				ersetzt durch		