
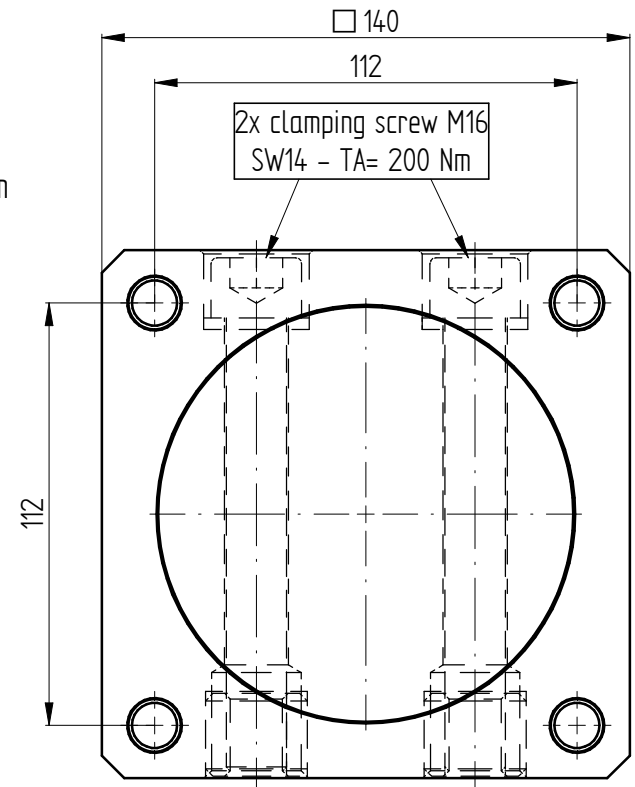
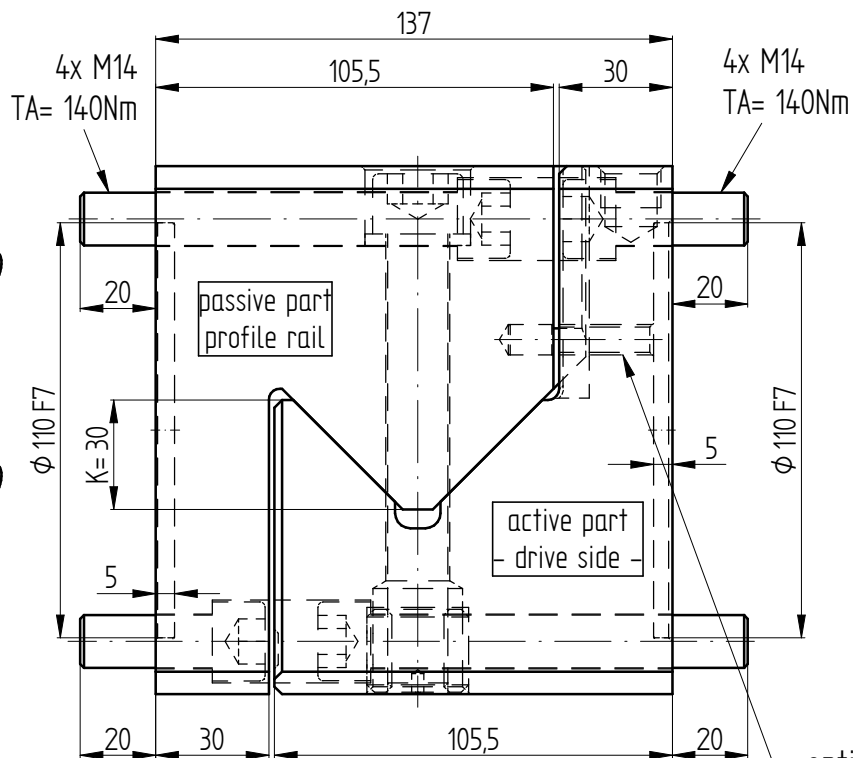


parking position - clamping screw

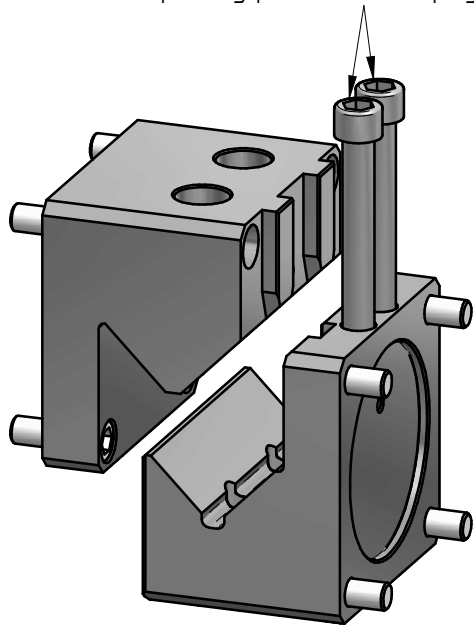

optional  
- Initiator -  
clamping control

Material  
high tensile aluminium - anodized  
threaded bushing: heat treated steel  
screws: ISO 4762 - 12.9

axial operating force ( push-pull )  $FA = 80\text{ kN}$   
vertical force - side load  $FV = 80\text{ kN}$   
bending moment  $MB = 8000\text{ Nm}$

						Werkstoffbezeichnung	Werkstoffnummer	Maßstab
						-	-	0,75
						Rohteil-/Vorteilnummer	Gewicht	
						-	8,0 kg	
						sectional - rail - coupling		
						PKP 140 x 140		
			gepr.					