
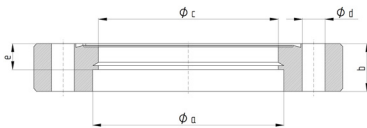


Flansche zum Einschweißen

Anschweißflansch fest aus Edelstahl (1.4301)




DN	16	35	40	63	100	150
Øa mm	18,2	38,2	42,4	71	104,5	154,5
b mm	7,3	13	13	17,5	20	22
Øc mm	16	35	38,4	66	100	151
Ød mm	6x4,3	6x6,6	6x6,6	8x8,5	16x8,5	20x8,5
e	4	5	5	9,5	10	10
Art.Nr.:	51150929	51150946	51150922	51150901	51151877	51150908

nach DIN ISO 2768-mK

DN	200	250
Øa mm	206,5	256,5
b mm	24,5	26
Øc mm	200	250
Ød mm	24x8,5	32x8,5
e	10	10
Art.Nr.:	51151878	51151879

- Druckbereich: bis $1 \cdot 10^{-12}$ hPa
- Temperaturbereich: -196°C bis 300°C

Anschweißflansch fest mit Gewinde, aus Edelstahl (1.4301)



DN	16	35	40	63	100	150
Øa mm	18,2	38,2	42,4	71	104,5	154,5
b mm	7,3	13	13	17,5	20	22
Øc mm	16	35	38,4	66	100	151
Ød mm	6xM4	6xM6	6xM6	8xM8	16xM8	20xM8
e	4	5	5	9,5	10	10
Art.Nr.:	51150940	51151882	51151370	51151369	51151883	51151884

nach DIN ISO 2768-mK

DN	200	250
Øa mm	206,5	256,5
b mm	24,5	26
Øc mm	200	250
Ød mm	24xM8	32xM8
e	10	10
Art.Nr.:	51151885	51151886

- Druckbereich: bis $1 \cdot 10^{-12}$ hPa
- Temperaturbereich: -196°C bis 300°C